


WARNING
EXPLOSION HAZARD
DO NOT CONNECT
OR DISCONNECT
UNDER LOAD!

HARTING Electric
09365162702
XXXXXXXXXX
90V 10A
Class I, Division 2 Groups A, B, C, D
Temperature Class: T6
Ambient Temperature: -20...+40C

FOR USE WITH HAN 16E CRIMP: AWG 14, 16
FOR USE WITH Cable Type:
PLTC, PLTC-ER, ITC, ITC-ER, MC, MV, AND TC
FOR USE IN CLASS I, DIVISION 2 GROUPS A, B, C AND D
HAZARDOUS LOCATIONS OR UNCLASSIFIED LOCATIONS

THE INSTALLATION MUST BE IN
ACCORDANCE WITH THE
ASSOCIATED LOCATION
RESTRICTIONS OF THE NATIONAL
ELECTRIC CODE OR CANADIAN
ELECTRICAL CODE AS
APPLICABLE, INCLUDING ISSUES
SUCH AS THE ROUTING,
SUPPORT AND LENGTH OF THE
INVOLVED CORD OR CABLE.

WARNING
EXPLOSION HAZARD
DO NOT CONNECT
OR DISCONNECT
UNDER LOAD!

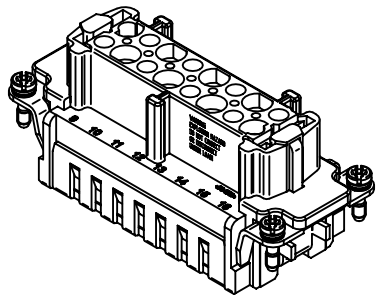

	All rights reserved Department EL PD	All Dimensions in mm Original Size DIN A4	Scale 1:1	Free size tol.	Ref. Sub.
	HARTING D-32339 Espelkamp	Created by HELLMANN	Inspected by SCHNIEDER	Standardisation	Date 2023-01-24
		Title Han 16Ex-UL-F-C	Doc-Key / ECM-Nr. 100669634/UGD/001/E 500000235316		Rev. E
		Type TB	Number 09 36 516 2702		Page 1/1